


WIDE INNER RING BEARINGS



UC 200 Series Normal Duty Set Screw Locking

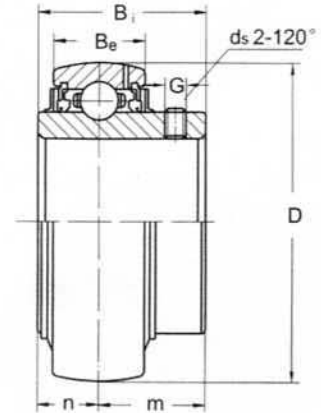

BEARING
UNITS

Unit No.	Shaft Dia.		Dimensions inch / mm						Basic load Ratings lbf / N		Weight		
	In.	mm	D	Bi	Be	n	m	G	ds	dynamic C	static Co	kg	Lbs
UC 201		12										0.21	0.46
201-8	1/2											0.21	0.46
202		15										0.20	0.44
202-10	5/8		1-27/32	1-1/4	5/8	1/2	23/32	0.197	1/4-28UNF	2900	1460	0.19	0.42
203		17	47	31	16	12.7	18.3	5	M6x1.0	12890	6490	0.18	0.40
204		20										0.17	0.37
204-12	3/4											0.18	0.40
UC 205		25										0.20	0.44
205-14	7/8		2-1/16	1-11/32	21/32	9/16	25/32	0.216	1/4-28UNF	3150	1700	0.23	0.51
205-15	15/16		52	34	17	14.3	19.7	5.5	M6x1.0	14000	7560	0.21	0.46
205-16	1											0.20	0.44
UC 206		30										0.33	0.73
206-17	1-1/16		2-7/16	1-1/2	3/4	5/8	7/8	1/4	1/4-28UNF	4390	2510	0.37	0.81
206-18	1-1/8		62	38.1	19	15.9	22.2	6	M6x1.0	19510	11160	0.35	0.77
206-19	1-3/16											0.33	0.73
206-20	1-1/4											0.30	0.66
UC 207		35										0.40	0.88
207-20	1-1/4		2-27/32	1-11/16	25/32	11/16	1	0.256	5-16/24UNF	5770	3450	0.55	1.21
207-21	1-5/16		72	42.9	20	17.5	25.4	6.5	M8x1.0	25640	15330	0.52	1.14
207-22	1-3/8											0.49	1.08
207-23	1-7/16											0.46	1.01
UC 208		40										0.65	1.43
208-24	1-1/2		3-5/32	1-15/16	13/16	3/4	1-3/16	5/16	5-16/24UNF	6500	3850	0.69	1.52
208-25	1-9/16		80	49.2	21	19	30.2	8	M8x1.0	28890	17110	0.67	1.47
UC 209		45										0.70	1.54
209-26	1-5/8		3-11/32	1-15/16	7/8	3/4	1-3/16	5/16	5-16/24UNF	7350	4100	0.80	1.76
209-27	1-11/16		85	49.2	22	19	30.2	8	M8x1.0	32670	18220	0.76	1.67
209-28	1-3/4											0.71	1.56
UC 210		50										0.80	1.76
210-30	1-7/8		3-35/64	2-1/32	15/16	3/4	1-9/32	11/32	3/8-24UNF	7900	4690	0.87	1.91
210-31	1-15/16		90	51.6	24	19	32.6	9	M10x1.25	35110	20840	0.82	1.80
210-32	2S											0.77	1.69
UC 211		55										1.08	2.38
211-32	2		3-15/16	2-3/16	31/32	7/8	1-5/16	11/32	3/8-24UNF	9750	5850	1.23	2.71
211-34	2-1/8		100	55.6	25	22.2	33.4	9	M10x1.25	43330	26000	1.18	2.60
211-35	2-3/16											1.06	2.33
UC 212		60										1.53	3.37
212-36	2-1/4		4-11/32	2-9/16	1-1/16	1	1-9/16	27/64	3/8-24UNF	11500	8100	1.66	3.65
212-38	2-3/8		110	65.1	27	25.4	39.7	10.5	M10x1.25	51110	36000	1.51	3.32
212-39	2-7/16											1.44	3.17
UC 213		65										1.85	4.07
213-40	2-1/2		4-23/32	2-9/16	1-3/32	1	1-9/16	15/32	3/8-24UNF	12800	8900	1.94	4.27
			120	65.1	28	25.4	39.7	12	M10x1.25	56890	39560		
UC 214		70										2.10	4.62
214-43			4-29/32	2-15/16	1-3/16	1-3/16	1-3/4	15/32	7/16-20UNF	14000	9900	2.20	4.84
214-44	2-3/4		125	74.6	30	30.2	44.4	12	M12x1.25	62220	44000	2.11	4.64
UC 215		75										2.35	5.17
215-47	2-15/16		5-1/8	3-1/16	1-3/16	1-5/16	1-3/4	15/32	7/16-20UNF	14900	11000	2.39	5.26
215-48	3		130	77.8	30	33.3	44.5	12	M12x1.25	66220	48890	2.26	4.97